


## TOPLOVODNI KOTAO NA ČVRSTO GORIVO TIP TKM

Kotao tip TKM je konstrukcijski identičan kotlu tip TK i TKV, s tim da je dodatno opremljen i multiciklonom koji služi za smanjenje emisije čvrstih čestica iz kotla u atmosferu.

Multiciklon se radi u blok verziji gdje je zavaren za kotao ili po narudžbi odvojeno od kotla.

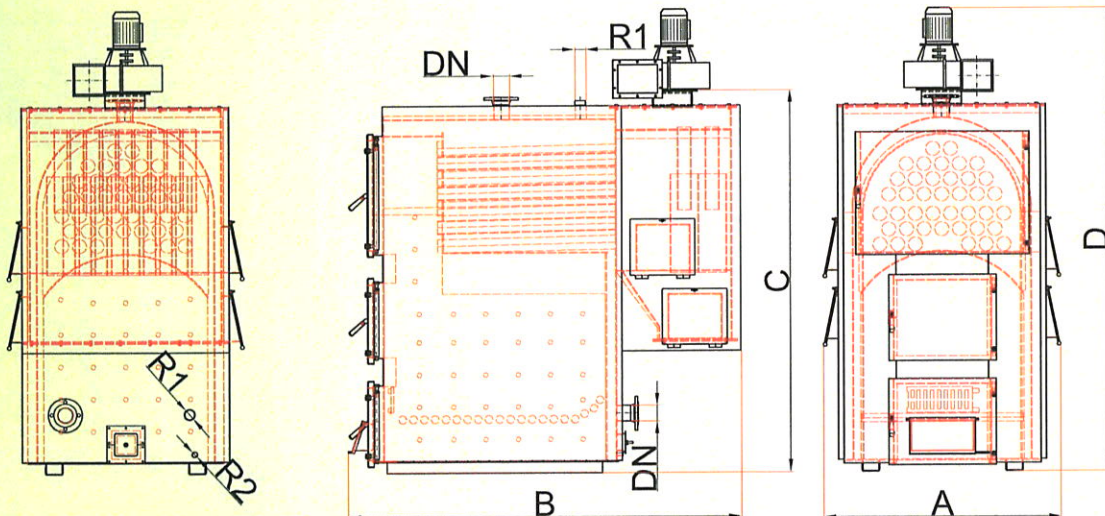

TIP	SNAGA (Kw)	DIMENZIJE (mm)				PRIKLJUČCI (col)				Potrebna promaja (Pa)	Masa kotla (kg)	Sadržaj vode u kotlu (l)
		A	B	C	D	DN	R1	R2	R3			
TKM 100	100	1065	1845	1215	1740	50	1	3/4	3/4	38	1004	320
TKM 125	125	1065	1895	1275	1800	65	5/4	3/4	3/4	42	1020	336
TKM 150	150	1065	2020	1235	1760	65	5/4	3/4	3/4	45	1240	477
TKM 175	175	1260	2030	1935	2460	80	6/4	3/4	3/4	47	1340	572
TKM 200	200	1260	2115	2045	2570	80	2	3/4	3/4	50	1470	650
TKM 250	250	1305	2180	2150	2675	80	2	3/4	3/4	53	1660	780
TKM 300	300	1305	2255	2180	2825	80	2	3/4	3/4	53	2250	870
TKM 350	350	1420	2370	2260	2905	80	2	3/4	3/4	53	2650	1050
TKM 400	400	1570	2560	2310	2950	100	2	3/4	3/4	53	2950	1150
TKM 450	450	1540	2560	2390	3035	100	2	3/4	3/4	53	3100	1200
TKM 550	550	1590	2715	2490	3135	100	2	3/4	3/4	57	3900	1550
TKM 750	750	1815	2920	2640	3285	100	2 1/2	3/4	3/4	59	5220	2140
TKM 850	850	1815	3080	2640	3285	100	2 1/2	3/4	3/4	65	5420	2350
TKM 1000	1000	1925	3090	2690	3335	100	2 1/2	3/4	3/4	65	6120	2597
TKM 1200	1200	1925	3320	2695	3400	100	2 1/2	3/4	3/4	70	6540	3240
TKM 1500	1500	2150	3515	2805	3510	125	2 1/2	3/4	3/4	70	7450	3820
TKM 2000	2000	2150	3915	2805	3510	125	2 1/2	3/4	3/4	80	7850	4950