


## TOPLOVODNI ELEKTRO KOTLOVI TIP TERMO BLOK

Termo blok "TOPLING"-TB pored elektro kotla sadrži i cirkulacionu pumpu, ekspanzionu posudu i sigurnosni ventil koji su ukomponovani uz rezervoar vode, dok je termomanometar smješten na oplati termobloka. Termoblokovi se izrađuju u varijantama 6, 9, 12, 18 i 24 kW, a po narudžbi i većih snaga.

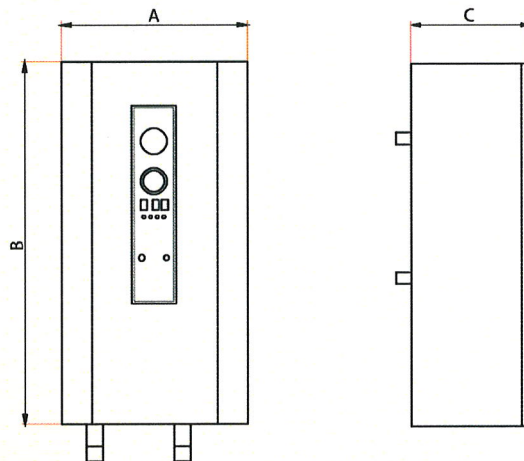

| TIP   | Snaga (Kw) | Grijači | Napojni vod (mm <sup>2</sup> ) | Osiguračii (A) | Radni pritisak (bar) | Priključci (col) | Visina (A) (mm) | Širina (B) (mm) | Dubina (C) (mm) |
|-------|------------|---------|--------------------------------|----------------|----------------------|------------------|-----------------|-----------------|-----------------|
| TB-6  | 6          | 1x6     | 5x2.5                          | 3x10           | 2.5                  | 1                | 700             | 330             | 220             |
| TB-9  | 9          | 1x9     | 5x2.5                          | 3x16           | 2.5                  | 1                | 700             | 330             | 220             |
| TB-12 | 12         | 2x6     | 5x4                            | 3x20           | 2.5                  | 1                | 700             | 330             | 220             |
| TB-18 | 18         | 3x6     | 5x4                            | 3x35           | 2.5                  | 1                | 700             | 340             | 220             |
| TB-24 | 24         | 4x6     | 5x6                            | 3x35           | 2.5                  | 1                | 760             | 440             | 240             |
| TB-30 | 24         | 5x6     | 5x10                           | 3x50           | 2.5                  | 5/4              | 760             | 440             | 330             |
| TB-36 | 24         | 5x6     | 5x10                           | 3x63           | 2.5                  | 5/4              | 760             | 440             | 330             |